

08-03.00

17

PTO/SB/05 (2/98)

Approved for use through 09/30/2000. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY
PATENT APPLICATION
TRANSMITTAL

Attorney Docket No. 4015-668

First Inventor or Application Identifier

Vance et al.

Title

CAMERA DEVICE WITH SELECTABLE IMAGE PATHS

Express Mail Label No.

EL634190129US

(Only for new nonprovisional applications under 37 CFR § 1.53(b))

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ *Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 19]
(preferred arrangement set forth below)
- Descriptive title to the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 10]
4. ☒ Oath or Declaration [Total Pages 4]
- a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a
copy of the oath or declaration is supplied under Box 4b,
is considered as being part of the disclosure of the
accompanying application and is hereby incorporated by
reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☒ 37 C.F.R. § 3.73(b) Statement ☒ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ *Small Entity ☐ Statement filed in prior application,
Statement(s) Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Other: _____

*NOTE FOR ITEMS 1 & 14: IN ORDER TO BE
ENTITLED TO PAY SMALL ENTITY FEES, A SMALL
ENTITY STATEMENT IS REQUIRED (37 C.F.R.
§ 1.27), EXCEPT IF ONE FILED IN A PRIOR
APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information below and in a preliminary statement:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____/_____
Prior application information: Examiner: Group/Art Unit:

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Labelor ☐ Correspondence address below

(Insert Customer No. or Attach bar code label here)

24112

NAME	PATENT TRADEMARK OFFICE			
ADDRESS				
CITY	STATE	ZIP CODE		
COUNTRY	TELEPHONE	FAX		

Name (Print/Type)	David E. Bennett	Registration No. (Attorney/Agent)	32,194
Signature	<i>David E. Bennett</i>	Date	August 2, 2000


Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Express Mail Label No.: EL634190129US

Date Mailed: August 2, 2000

**UNITED STATES PATENT APPLICATION
FOR GRANT OF LETTERS PATENT**

**Scott Vance
Charles Hunt
INVENTORS**



**CAMERA DEVICE WITH SELECTABLE
IMAGE PATHS**

COATS & BENNETT, P.L.L.C.

P.O. Box 5
Raleigh, NC 27602
(919) 854-1844

CAMERA DEVICE WITH SELECTABLE IMAGE PATHS

BACKGROUND OF THE INVENTION

The present invention relates generally to camera devices and, more particularly, to a
5 camera device having first and second selectable image paths.

Camera phones, which comprise a mobile, hand-held telephone and a digital camera in
the same physical package, have recently been introduced to the market. At present, the
development of digital camera phones is in its infancy. Wideband Code Division Multiple
Access (WCDMA) and other emerging technologies will soon make it possible to send digital
10 images and live video over wireless communication networks. These emerging technologies
will spawn a new breed of camera phones that can be used for teleconferencing or for recording
video that can be transmitted over the wireless communications network.

When recording video, the user generally likes to see the image being recorded. In
modern video cameras, the image seen through the lens of the camera is presented on a liquid
crystal display. The display is typically oriented to face the opposite direction of the lens so that
15 the user can use the display as a viewfinder to view the image being recorded. However, when
the user is participating in a video conference, a display facing in the same direction as the lens
is needed so that the user can see the other parties while transmitting the user's own image.
Modern video cameras solve this problem by mounting the display on a swivel so that it can be
20 rotated to face in either direction. While it is technically feasible to make a display for a camera
phone that can swivel, that is not a very practical solution for a camera phone. Color displays
have numerous connections that would require use of a flexible connector. If a flexible
connector is used, the display would need to swivel in one direction to move from position A to
position B, and in the opposite direction to move back from position B to position A. Also the
25 design of the flex is difficult to implement and is often unreliable.

SUMMARY OF THE INVENTION

The present invention relates to camera devices, such as a digital camera or camera phone, having first and second selectable image paths. The camera device comprises a housing having a first light aperture formed in a front side of the housing and a second light aperture formed in the back side of the housing. An image sensor is disposed within the housing for converting images formed by light on the image sensor into raw image data. The raw image data is processed by an image processor to produce formatted image signals for output to a display or for transmission by a transceiver. An optical system selectively directs light along either the first or second image paths onto the image sensor. In an exemplary embodiment, the optical system comprises a rotatable or slidable mirror assembly. When the rotatable mirror assembly is in a first position, light entering housing through the first light aperture is directed along the first image path to the image sensor. When the mirror assembly is in the second position, light entering through the second light aperture is directed along a second image path to the image sensor.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram of an exemplary camera device according to the present invention.

Figure 2 is a perspective view of the camera device as seen from the front.

Figure 3 is a perspective view of the camera device as seen from the back.

Figure 4 is a perspective view showing one embodiment of a mirror assembly used in the camera device.

Figure 5 and 6 are schematic illustrations showing the mirror assembly in the forward-looking and rearward-looking positions respectively.

Figure 7 is a perspective view showing an alternate embodiment of the mirror assembly including a lens cover.

Figures 8 and 9 are schematic diagrams showing variation of the first embodiment of the camera device with two fixed lenses.

5 Figure 10 is a perspective view showing a second exemplary embodiment of the camera device.

Figure 11 is a perspective view showing the mirror assembly used in the second embodiment of the camera device.

10 Figure 12 is a perspective view showing a third exemplary embodiment of the camera device.

Figure 13 is a perspective view showing the mirror assembly used in the third embodiment of the camera device.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

15 Figure 1 is a block diagram of an exemplary camera device indicated generally by the numeral 10. The exemplary embodiment of the camera device comprises a camera phone, which is used as an example to describe one application of the invention. The present invention is not, however, limited to a camera phone. The present invention may be embodied in other camera devices including without limitation a digital camera, a mobile terminal, or other devices
20 incorporating a camera. Mobile terminals may include cellular radiotelephones, personal communication services (PCS) devices, personal digital assistants (PDAs), laptop computers, and palm-top computers.

The camera phone 10 comprises a microprocessor 12, program memory 14, input/output circuit 16, transceiver 18, audio processing circuit 20, user interface 22, image
25 sensor 32, image processor 34, and optical system 50. Microprocessor 12 controls the

operation of the camera phone 10 according to programs stored in program memory 14.

Input/output circuits 16 interface the microprocessor 12 with the user interface 22, transceiver 18, audio processing circuit 20, and image processing circuit 34. User interface 22 comprises a keypad 24, display 26, microphone 28, and speaker 30. Keypad 24 allows the operator to dial
5 numbers, enter commands, and select options. The display 26 allows the operator to see dialed digits, call status, and other service information. Microphone 28 converts the user's speech into electrical audio signals, and speaker 30 converts audio signals into audible signals that can be heard by the user. Audio processing circuit 20 provides basic analog output signals to the speaker 30 and accept analog audio inputs from the microphone 28. Transceiver 18 is coupled
10 to an antenna 36 for receiving and transmitting signals.

Image sensor 32 captures images formed by light impacting on the surface of the image sensor 32. The image sensor 32 may be any conventional image sensor 32, such as a charge-coupled device (CCD) or complementary metal oxide semiconductor (CMOS) image sensor. Image processor 34 processes raw image data collected by the image sensor 32 for
15 subsequent output to the display 26 or for transmission by the transceiver 18. The image processor 34 is a conventional signal microprocessor programmed to process image data, which is well known in the art.

Figures 2 and 3 are perspective views illustrating an exemplary embodiment of the camera phone 10. The camera phone 10 includes a housing 40, which in the disclosed
20 exemplary embodiment has a front cover 42 and a back cover 44. The keypad 24, display 26, microphone 28, and speaker 30 are disposed in the front cover 42. The front cover 42 further includes a first light aperture 46 disposed above the display 26, which faces in the same direction as the display 26. Back cover 44 includes a second light aperture 48, which faces in the opposite direction of the display 26. As will be described more fully below, the first and

second light apertures 46, 48 allow the camera phone to look forwardly, e.g. the same direction as the display 26, or rearwardly, e.g. the opposite direction of the display 26.

Contained within housing 40 is a printed circuit board 38 which contains the electronic components of the camera phone 10 such as the microprocessor 12, memory 14, I/O circuits 16, transceiver 18, audio processing circuit 20, and image processing circuit 34. Image sensor 32 is also typically mounted to printed circuit board 38.

Figure 4 is a perspective view illustrating the optical system 50 in the exemplary embodiment. The function of the optical system 50 is to selectively direct light along either a first image path or a second image path to the image sensor 32. The optical system 50 comprises an objective lens 54, a double-sided movable mirror 56, and a stationary mirror 58. The objective lens 54 and movable mirror 56 are part of a rotating mirror assembly 52. Mirror assembly 52 includes, in addition to the objective lens 54 and movable mirror 56, a spherical housing 60 mounted on a shaft 62. A ring 64 is disposed on the outer end of the shaft 62, which extends through the housing 40. Ring 64 provides a means for the user to rotate the mirror assembly 52. Those skilled in the art will recognize that the element for rotating the mirror assembly 52 may be located in the front, back, or sides of housing 40 and that a variety of different elements could be used. Mirror assembly 52 is held by a spring clip 66 that engages a pair of flat surfaces 68 on shaft 62 of the mirror assembly 52. The flat surfaces 68 function as an index mechanism to yieldably station the mirror assembly 52 at the forward-looking and rearward-looking positions as described more fully below.

Spherical housing 60 of mirror assembly 52 contains a cavity 66 having two openings – an entry opening 70 and exit opening 72. The axis of entry opening 70 is disposed perpendicular to the axis of shaft 62 so that the orientation of entry opening 70 changes when shaft 62 is rotated. The axis of exit opening 72 is coincident or parallel to the axis of shaft 62 so that exit opening 72 remains oriented in the same direction regardless of the angular position of

shaft 62. Objective lens 54 is mounted within or adjacent the entry opening 70. Movable mirror 56 is positioned within cavity 66 so that light entering through entry opening 70 is reflected out through exit opening 72. Light reflected out of the mirror assembly 52 is then reflected by stationary mirror 58 onto the surface of the image sensor 32, which is mounted to the printed circuit board 38.

The rotating mirror assembly 52 allows the objective lens 54 and movable mirror 56 to move between at least first and second positions. Equivalently, the objective lens 54 and movable mirror 58 could be mounted for sliding movement between first and second positions. In the first position, shown in Figure 5, light entering through the first light aperture 46 is directed along a first image path to the image sensor 32. In the second position, shown in Figure 6, light entering through the second light aperture 48 is directed along a second image path to the image sensor 32.

Figures 5 and 6 are schematic illustrations showing the operational positions of the mirror assembly 52. Light from an object is directed along either a first or second image path depending on the position of mirror assembly 52. Image sensor 32 picks up the reflected light and converts the reflected light to raw image data. The raw image data is processed by image processor 34 to provide an image signal which can be formatted for output to the display 26 or for transmission by the transceiver 18.

Figure 5 illustrates the mirror assembly 52 in the forward-looking position. Light enters the housing 40 (not shown in Figures 5 and 6) through the first light aperture 46 and passes through the objective lens 54. Movable mirror 56 reflects the light through the exit opening 72 in the lens housing 60 in the direction of the stationary mirror 58. Stationary mirror 58 reflects light exiting lens housing 60 onto the image sensor 32. The path illustrated in Figure 5 is referred to herein as the first image path.

In Figure 6, the mirror assembly 52 is rotated 180° from the position shown in Figure 5 to the rearward-looking position. In this position, light enters housing 40 through the second light aperture 48, passes through the objective lens 54, is reflected by movable mirror 56 through exit opening 72, and finally is reflected by stationary mirror 58 onto the image sensor 32. In this case, the image formed on the image sensor 32 will be inverted as compared to the image formed when the mirror assembly 52 is in the forward-looking position. A position sensor 80 detects the position of the mirror assembly 52 and generates a position signal that is input to the image processor 34. Based on the input from the position sensor 80, the image processor 34 inverts image so that the displayed image is correct.

A variety of different techniques can be used to detect the position of the mirror assembly 52. In the exemplary embodiment of Figure 4, the position sensor 80 comprises a wiper contact 82 disposed on the shaft 62 of the mirror assembly 52. When the mirror assembly 52 is rotated to the rearward-looking position, the wiper contact 82 on the shaft 62 makes an electrical connection between two spaced-apart contacts 84 on the printed circuit board 38 and causes a signal to be generated indicative of the position of the mirror assembly 52. In this example, the signal is a voltage signal. Those skilled in the art will recognize that many other ways exist to detect position of the mirror assembly 52. Instead of a wiper contact 82, a mechanical switch actuated by rotation of the mirror assembly 52 could be used to determine the position of the mirror assembly 52. Also, there are many different types of non-contact position sensors 80 that can be used to detect the position of the mirror assembly 52, including capacitance sensors, inductance sensors, Hall-effect sensors, magnetic sensors, and optical sensors.

The camera phone 10 of the present invention can be used for video conferencing or as a conventional video camera. For teleconferencing, the mirror assembly 52 is oriented so that the lens faces forward, i.e., in the same direction as the display 26. In this orientation, the

user's image is transmitted while the user talks on the camera phone 10. At the same time, the user can view the image being transmitted from the person at the other end of the call. To use the camera phone 10 as a video camera, the mirror assembly 52 is rotated to the rearward-looking position, i.e., facing away from the display 26. In this position, the user can use the camera phone 10 to record video images while using the display 26 as a viewfinder. In a preferred embodiment, a button 86 on the camera phone 10 allows the user to turn imaging system on and off.

Figure 7 shows an alternate embodiment of the mirror assembly 52. The embodiment shown in Figure 7 is identical to the embodiment of Figure 4 but with the addition of a lens cover 90. Lens cover 90 serves to cover the objective lens 54 when not in use. Lens cover 90 is semi-spherical in form and conforms to the outer surface of spherical housing 60. A small pin 92 extends outward from the spherical housing 60. When the objective lens 54 is not in use, the mirror assembly 52 is rotated so that the objective lens 54 is covered by lens cover 90. The lens cover 90 can be rotated to cover either the first light aperture 46 or second light aperture 48. In Figure 7, the lens cover 90 is covering the second light aperture 48. To move the lens cover 90 so as to conceal the first light aperture 46, the user rotates the mirror assembly 52 in either direction until pin 92 engages the edge of lens cover 90 and then continues to rotate the mirror assembly 52. Once pin 92 engages the lens cover 90, the lens cover 90 rotates with the remainder of the mirror assembly 52. The same procedure is followed to rotate the lens cover 90 back to the position shown in Figure 7.

As an alternative to a rotating lens cover 90, the housing 40 of the camera phone 10 may include movable shutters or other covers. Also, a separate lens cover 90 or shutter can be eliminated by proper sizing of the entry opening 70. In this case, the mirror assembly 52 could be rotated such that the objective lens 54 faces sideways and the spherical housing 60 closes both light apertures 46 and 48.

Those skilled in the art will appreciate that many other arrangements of lenses and mirrors are possible for carrying out the present invention. For example, the objective lens 54 in the mirror assembly 52 can be replaced by two stationary objective lenses 54' - one for each light aperture 46, 48 – as shown in Figures 8 and 9. In this variant of the invention, the stationary lenses 54' are fixed. Additional lenses or mirrors could also be used. For example, a focusing lens or special effects lens could be included in the first or second image paths. Also, by positioning the image sensor 32 along the axis of the exit opening 72 of the mirror assembly 52, the stationary mirror 58 could be eliminated. In another variation, the objective lens 54 could be movable between at least first and second positions while using stationary reflecting mirrors.

It is also possible to replace the movable mirror 56 with a series of stationary mirrors and liquid crystal light valves as are commonly used in projection systems. The light valves could be used to selectively block or transmit light entering through the first and second light apertures by applying a voltage to the light valve which alters the transmission characteristics of the light valve. This would increase the total number of parts while eliminating movable parts. The light valves could be activated by a switch or button on the camera phone 10.

Thus, the particular arrangement of mirrors and lenses disclosed herein should not be construed as limiting the invention. The invention encompasses any arrangement of mirrors, lenses, light valves, or other components which allow light to be selectively directed along a plurality of image paths to an image sensor.

Figure 10 is a perspective view illustrating a second embodiment of the camera phone 10 of the present invention. The camera phone 10 of Figure 10 is similar to the embodiment of Figures 1 – 9 and, therefore, similar reference numbers are used to indicate similar parts. In the embodiment shown in Figure 10, a dial 65 is disposed in the front cover 42 of the camera phone 10. Dial 65 is part of a mirror assembly 52' shown in Figure 11. Mirror assembly 52'

includes a shaft 62' and a double-sided reflecting mirror 56'. Dial 65 is connected to one end of shaft 62'. Reflecting mirror 56' is mounted on shaft 62' so as to rotate with shaft 62'. Dial 65 is turned by the user's thumb to rotate the reflecting lens 56' between the first and second positions.

5 Figure 12 is a perspective view of a third embodiment of the camera phone 10. This embodiment is similar to the previous embodiments and, therefore, similar reference numbers are used to indicate similar parts. In the embodiment of Figure, a sliding mirror assembly 60", shown in Figure 13, is used in place of the rotating mirror assembly 60 and 60' of the previous embodiments. Mirror assembly 60" comprises a shaft 62" with a thumb pad 64" at each end thereof and a pair of single-sided reflecting mirrors 56". The single-sided reflecting mirrors 56" are mounted to the shaft 62". Reflecting mirrors 56" are disposed at a 90° angle with respect to one another. The mirror assembly 60" slides along the axis of the shaft 62" as indicated by the arrows in Figure 13 to selectively position the reflecting mirrors 56" in the first and second optical paths, respectively.

10
15 The present invention may, of course, be carried out in other specific ways than those herein set forth without departing from the spirit and essential characteristics of the invention. The present embodiments are, therefore, to be considered in all respects as illustrative and not restrictive, and all changes coming within the meaning and equivalency range of the appended claims are intended to be embraced therein.

CLAIMS

What is claimed is:

1. A combination mobile terminal and camera comprising:
 - a housing having a first light aperture formed in a first side of said housing and a second light aperture formed in a second side of said housing;
 - a wireless transceiver disposed within said housing for transmitting and receiving signals;
 - an image sensor disposed within said housing for converting images formed by light on said image sensor into electrical signals;
 - an optical system for selectively directing light passing through said first and second light apertures onto said image sensor; and
 - an image processor coupled to an output of said image sensor for processing electrical signals from said image sensor to produce image signals.
2. The combination mobile terminal and camera of claim 1 wherein said optical system comprises a mirror assembly having at least one movable mirror, said mirror assembly being movable between a first position to direct light entering through said first light aperture along a first image path onto said image sensor and a second position to direct light entering through said second light aperture along a second image path onto said image sensor.
3. The combination mobile terminal and camera of claim 2 wherein said mirror assembly comprises at least one movable mirror rotatable between at least first and second positions.

4. The combination mobile terminal and camera of claim 3 wherein said movable mirror directs light entering through said first light aperture along a first image path onto said image sensor when disposed in a first position and directs light entering through said second light aperture along said second image path onto said image sensor when disposed in a second position.
5. The combination mobile terminal and camera of claim 2 wherein said mirror assembly comprises at least first and second movable mirrors.
6. The combination mobile terminal and camera of claim 5 wherein said first and second movable mirrors slide between a first position and a second position.
7. The combination mobile terminal and camera of claim 5 wherein said first movable mirror directs light entering through said first light aperture along said first image path onto said image sensor when said first and second movable mirrors are disposed in said first position and wherein said second movable mirror directs light entering through said second light aperture along said second image path onto said image sensor when said first and second movable mirrors are disposed in said second position.
8. The combination mobile terminal and camera of claim 2 further comprising a position detector to detect the position of said mirror assembly, said image processor being responsive to a signal from said position detector to invert said image when said mirror assembly is in one of said first and second positions.

9. The combination mobile terminal and camera of claim 1 wherein said optical system further comprises at least one lens.

10. The combination mobile terminal and camera of claim 9 wherein said lens is movable between a first position along said first image path to a second position along said second image path.

11. The combination mobile terminal and camera of claim 10 further comprising a movable mirror assembly having at least one movable mirror, said mirror assembly being movable between a first position to direct light entering through said first light aperture along a first image path onto said image sensor and a second position to direct light entering through said second light aperture along a second image path onto said image sensor.

12. The combination mobile terminal and camera of claim 9 comprising a first lens disposed along said first image path and a second lens disposed along said second image path.

13. The combination mobile terminal and camera of claim 12 wherein said first and second lenses are fixed.

14. The combination mobile terminal and camera of claim 1 further comprising a display.

15. The combination mobile terminal and camera of claim 10 wherein said first aperture faces in the direction of said display and said second aperture faces in the direction opposite said display.

16. A camera comprising:

a housing;

a display mounted in said housing;

a first light aperture formed in a first side of said housing and facing in the direction of
said display;

a second light aperture formed in a second side of said housing and facing in a direction
opposite said display;

an image sensor disposed within said housing for converting images formed by light on
said image sensor into electrical signals;

an optical system for selectively directing light passing through said first and second light
apertures onto said image sensor; and

an image processor coupled to an output of said image sensor for processing electrical
signals from said image sensor to produce image signals.

17. The camera of claim 16 wherein said optical system comprises a mirror assembly having
at least one movable mirror, said mirror assembly being movable between a first position to
direct light entering through said first light aperture along a first image path onto said image
sensor and a second position to direct light entering through said second light aperture along a
second image path onto said image sensor.

18. The camera of claim 17 wherein said mirror assembly comprises at least one movable
mirror rotatable between at least first and second positions.

19. The camera of claim 18 wherein said movable mirror directs light entering through said
first light aperture along a first image path onto said image sensor when disposed in said first

position and directs light entering through said second light aperture along said second image path onto said image sensor when disposed in said second position.

20. The camera of claim 17 wherein said mirror assembly comprises at least first and
5 second movable mirrors.

21. The camera of claim 20 wherein said first and second movable mirrors slide between a first position and a second position.

10 22. The camera of claim 20 wherein said first movable mirror directs light entering through said first light aperture along said first image path onto said image sensor when said first and second movable mirrors are disposed in said first position and wherein said second movable mirror directs light entering through said second light aperture along a second image path onto
15 said image sensor when said first and second movable mirrors are disposed in said second position.

20 23. The camera of claim 22 further comprising a position detector to detect the position of said mirror assembly, said image processor being responsive to a signal from said position detector to invert said image when said mirror assembly is in one of said first and second positions.

24. The camera of claim 16 wherein said optical system further comprises at least one lens.

25 25. The camera of claim 24 wherein said lens is movable between a first position along said first image path to a second position along said second image path.

26. The camera of claim 25 further comprising a movable mirror assembly having at least one movable mirror, said mirror assembly being movable between a first position to direct light entering through said first light aperture along a first image path onto said image sensor and a second position to direct light entering through said second light aperture along a second image path onto said image sensor.

27. The camera of claim 24 comprising a first lens disposed along said first image path and a second lens disposed along said second image path.

28. The camera of claim 27 wherein said first and second lenses are fixed.

~~29.~~ A method for selectively displaying images seen through first and second apertures of a camera facing in opposing directions, said method comprising:

providing an movable mirror assembly for selectively directing light entering through said first and second apertures onto an image sensor to capture an image;
positioning said mirror assembly in a first position to direct light entering through said first light aperture along a first image path to capture an image seen through said first light aperture; and
positioning said mirror assembly in a second position to direct light entering through said second light aperture along a second image path to capture an image seen through said second light aperture.

30. The method of claim 27 wherein said mirror assembly comprises a movable mirror and wherein positioning said mirror assembly in said first and second positions comprises moving said mirror between said first and second positions.

5 31. The method of claim 28 wherein said movable mirror is rotatable and wherein moving said movable mirror between said first and second positions comprises rotating said movable mirror between said first and second positions.

32. The method of claim 28 wherein moving said movable mirror between said first and second positions comprises sliding said movable mirror between said first and second position.

10 ~~33.~~ A method of directing multiple images through multiple apertures onto an image sensor comprising:

15 recording a first image by directing the image through a first aperture onto a mirror assembly;

reflecting the first image from the mirror assembly and directing the reflected first image onto the image sensor;

20 recording a second image by directing the second image through a second aperture onto the mirror assembly; and

reflecting the second image from the mirror assembly and directing the reflected second image onto the image sensor.

34. The method of claim 33 wherein the mirror assembly includes a single mirror, and
25 wherein the first and second images are reflected from the single mirror onto the image sensor.

35. The method of claim 34 wherein the single mirror is movable between first and second positions, and wherein in the first position said single mirror aligns with said first aperture, and wherein in said second position said single mirror aligns with said second aperture.

5

36. The method of claim 35 wherein said single mirror is rotatable between said first and second positions.

37. The method of claim 33 wherein said mirror assembly includes first and second mirrors movable between first and second positions, and wherein in said first position said first mirror aligns with said first aperture, and wherein in said second position said second mirror aligns with said second aperture.

10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2

ABSTRACT OF THE DISCLOSURE

A camera device comprises a housing having first and second light apertures formed in opposing sides of the housing, an image sensor disposed within the housing for converting
5 images formed by light on said image sensor into electrical signals, an image processor coupled to the output of the image sensor for processing raw electrical signals from the image sensor to produce formatted image signals, and an optical system for selectively directing light entering said housing through said first and second light apertures onto said image sensor.

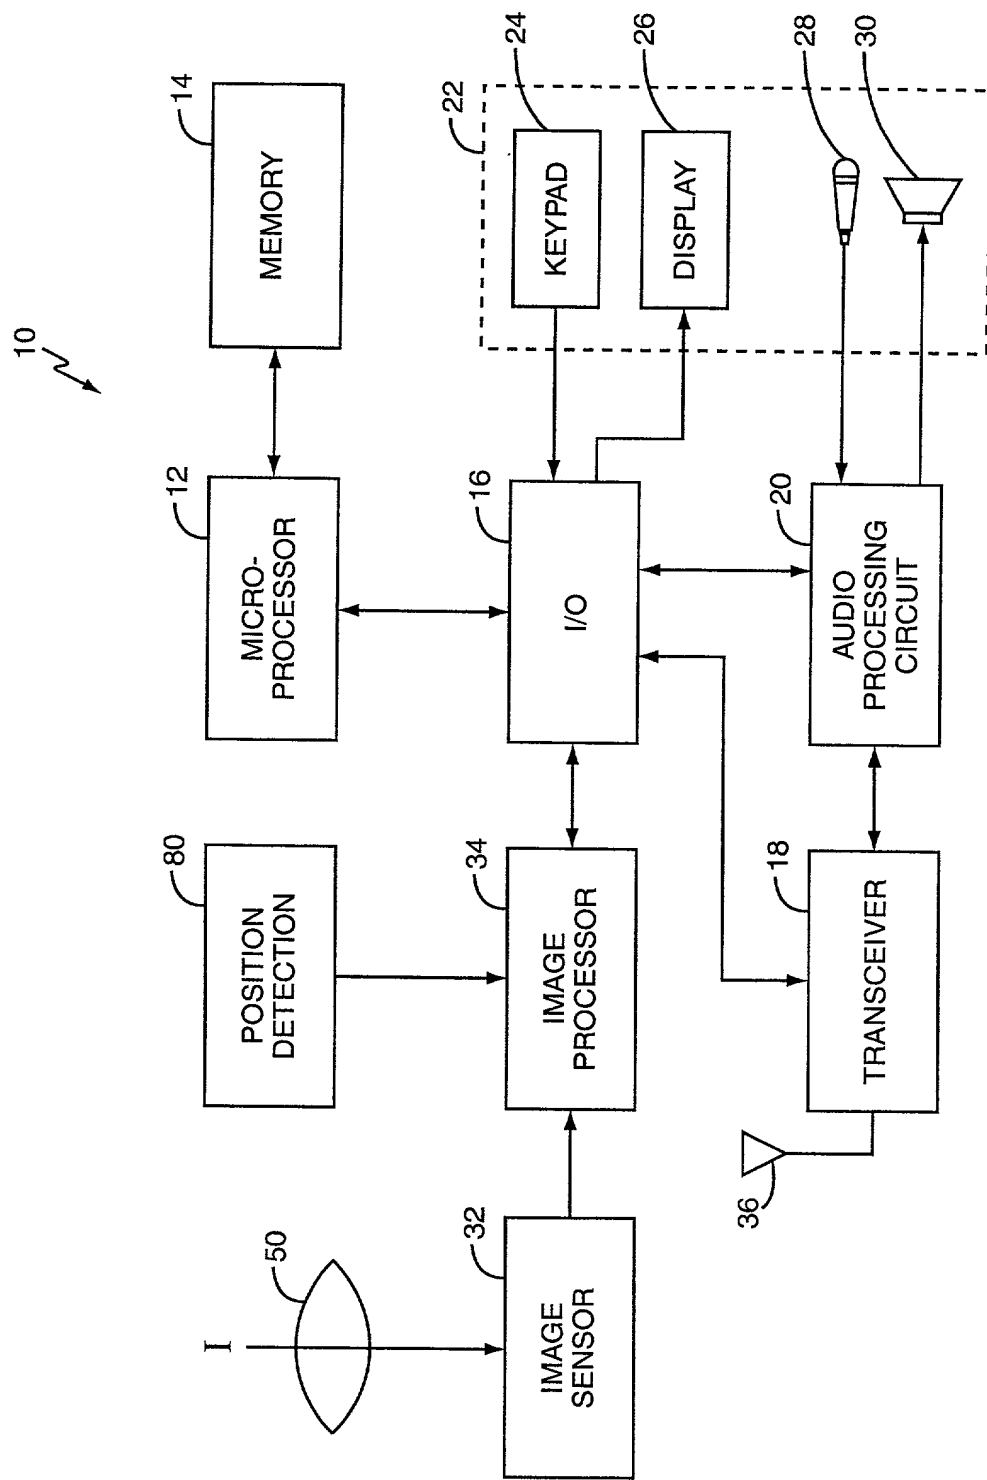


FIG. 1

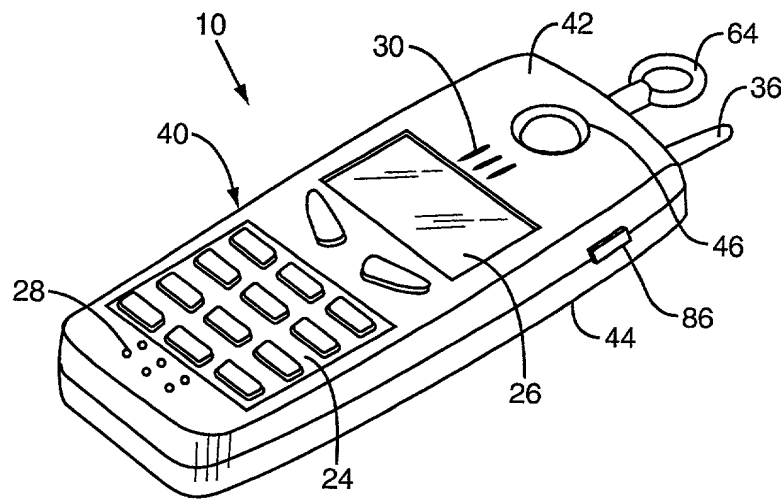


FIG. 2

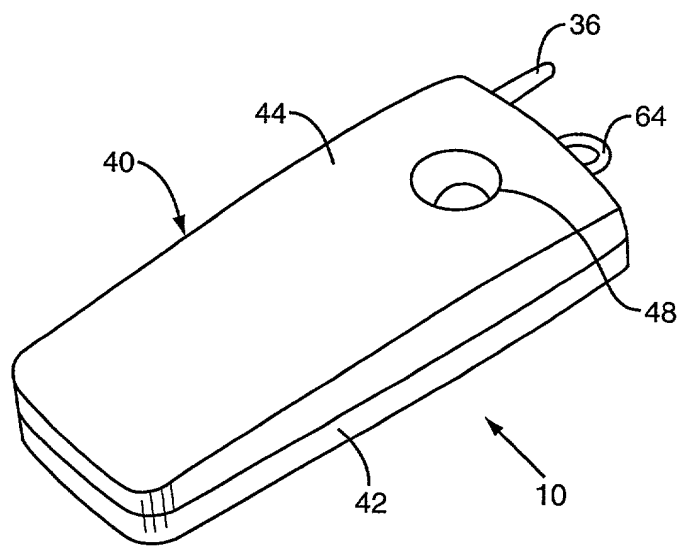


FIG. 3

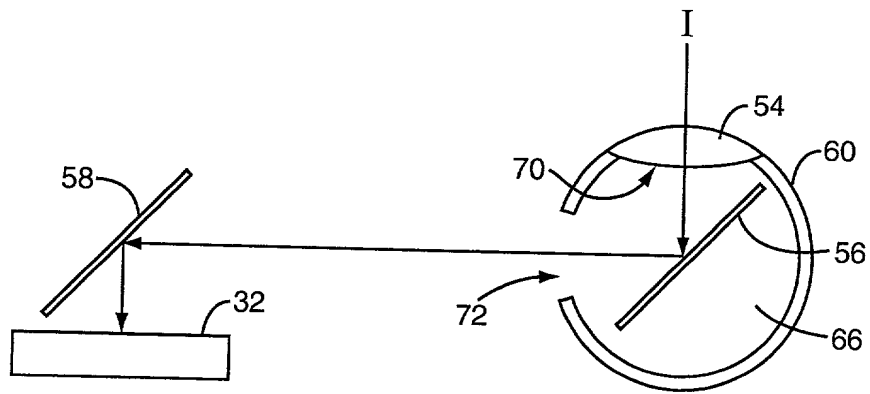


FIG. 5

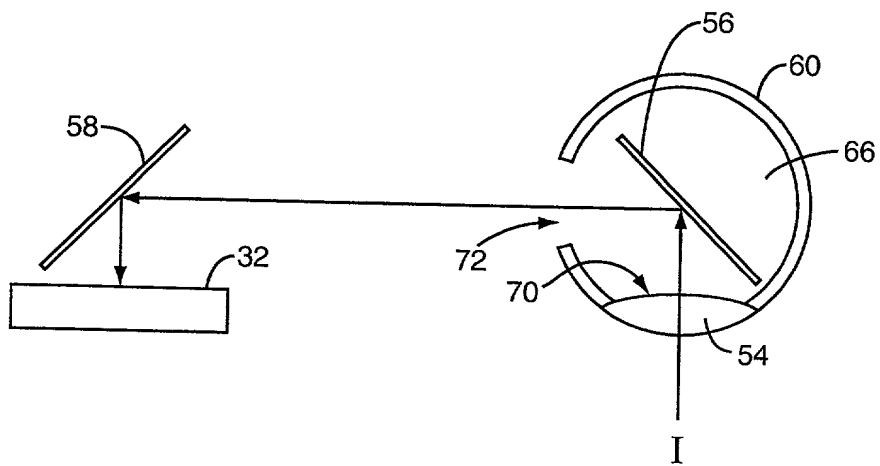


FIG. 6

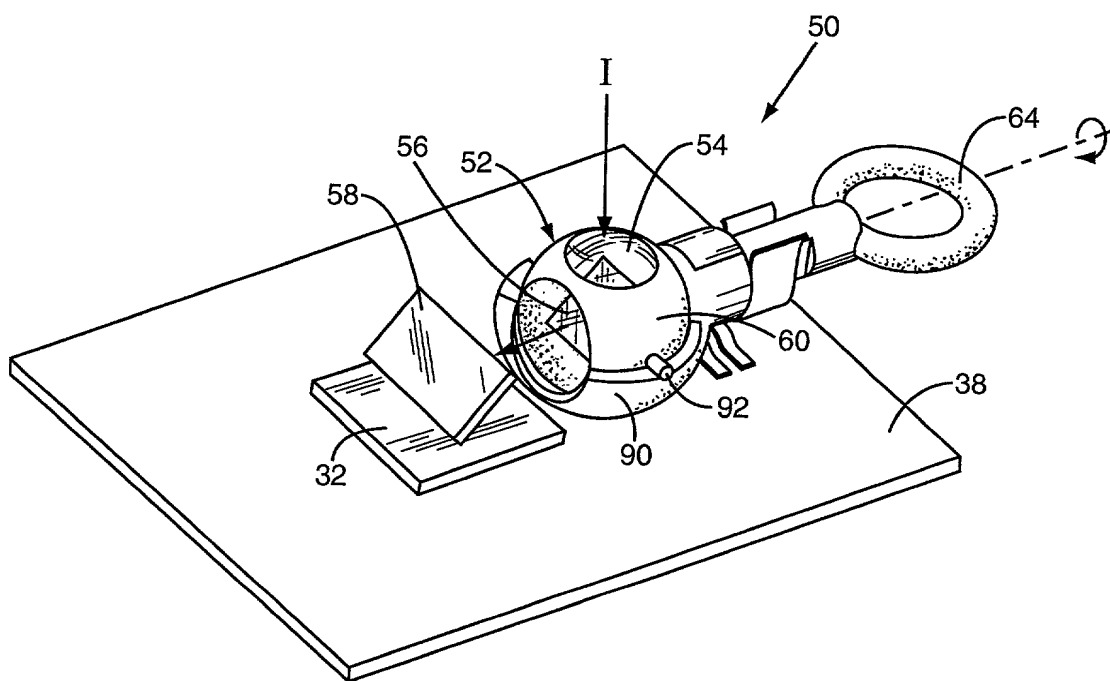


FIG. 7

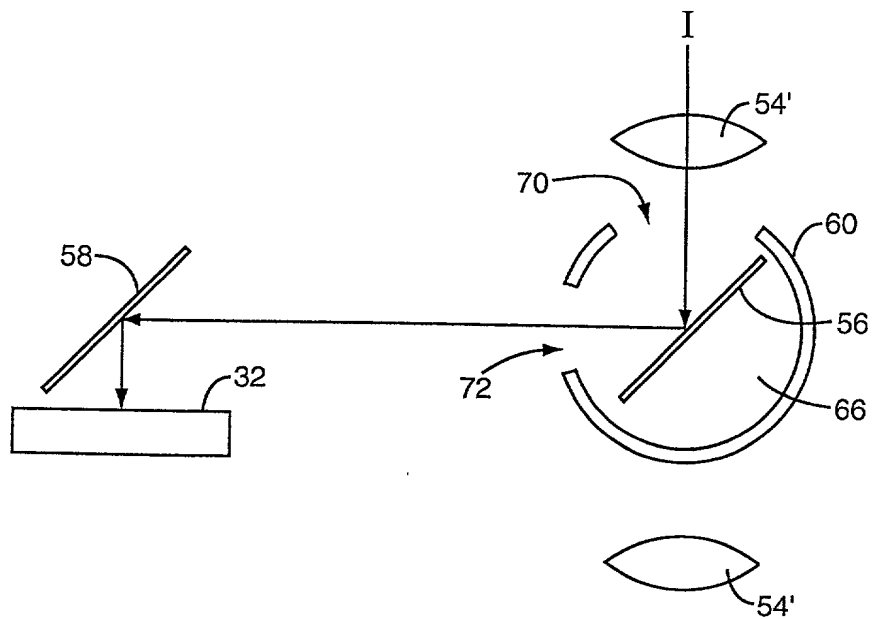


FIG. 8

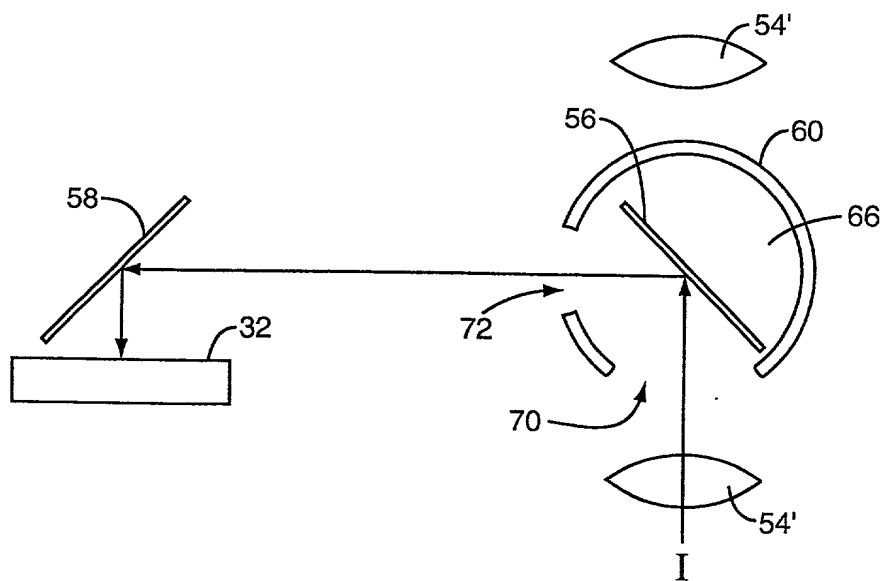


FIG. 9

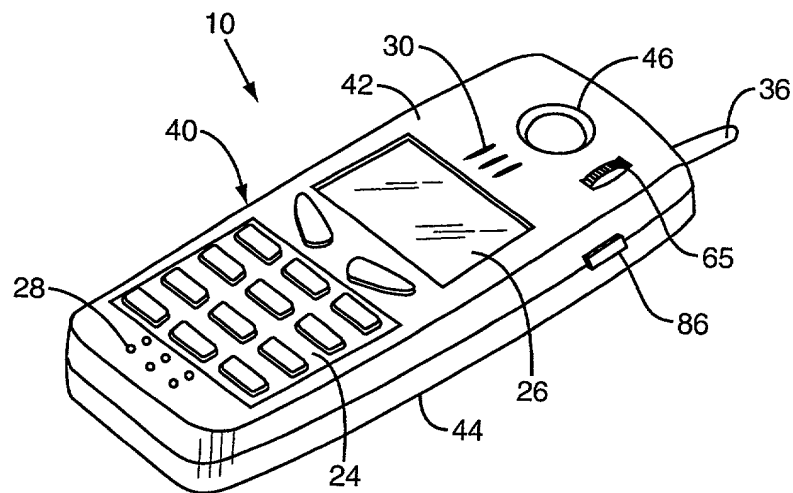


FIG. 10

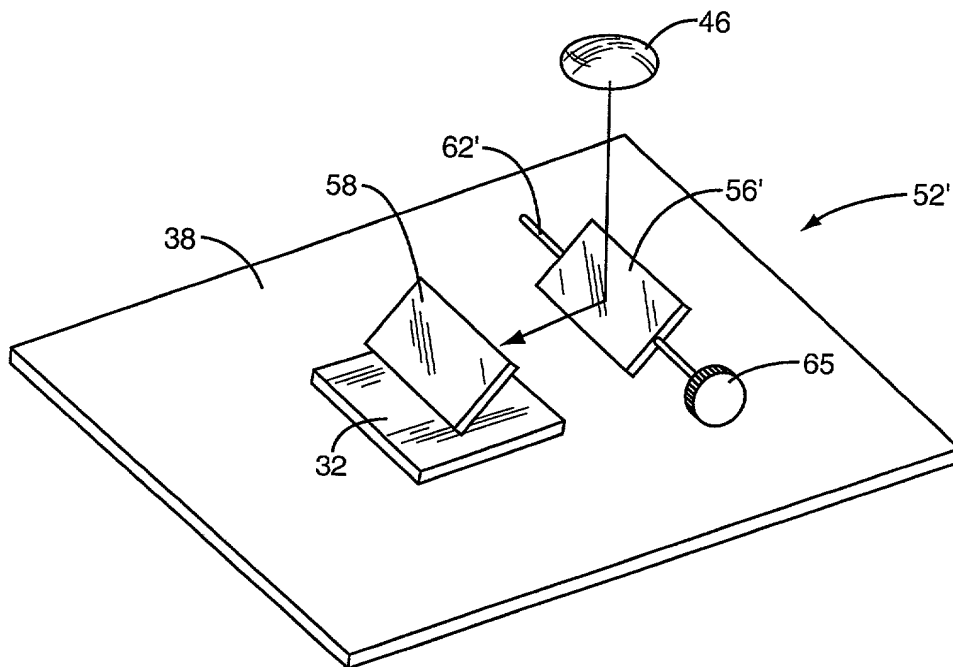


FIG. 11

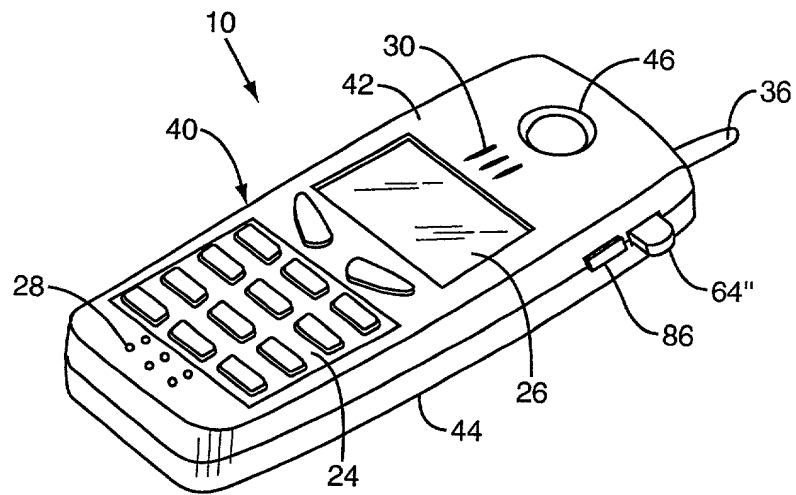


FIG. 12

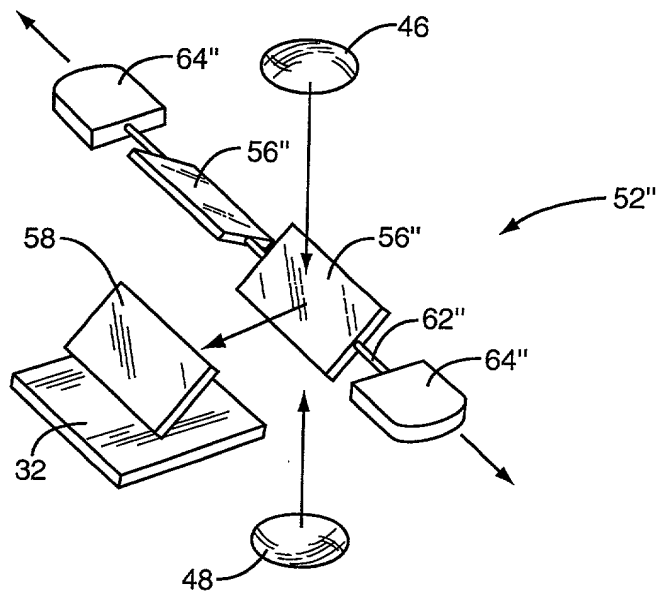


FIG. 13

Declaration and Power of Attorney for Patent Application

As below named inventors, we hereby declare that:

Our residences, post office addresses and citizenships are as stated below next to our names,

We believe that we are the original, first and joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled **CAMERA DEVICE WITH SELECTABLE IMAGE PATHS**, the specification of which

☒ [X] is attached hereto.

(Check one)

☐ [] was filed on _____ as
Application Serial Number _____
and was amended on _____
(if applicable)

We hereby state that we have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

We acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to us which is material to patentability (as defined in C.F.R. §1.56) in connection with the examination of this application.

We hereby claim foreign benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

NONE

(Number)

(Country)

(Day/Month/Year Filed)

☐ []
YES

☐ []
NO

(Number)

(Country)

(Day/Month/Year Filed)

☐ []
YES

☐ []
NO

(Number)

(Country)

(Day/Month/Year Filed)

☐ []
YES

☐ []
NO

Declaration and Power of Attorney for Patent Application

We hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, we acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

NONE

(Application Serial No.)

(Filing Date)

(Status: Patented/Pending/Abandoned)

(Application Serial No.)

(Filing Date)

(Status: Patented/Pending/Abandoned)

Power of Attorney: As a named inventor, I hereby appoint the following agents/attorneys to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

David K. Purks
Registration Number 40,133

Debra K. Stephens
Registration Number 38,211

Kevin A. Sembrat
Registration Number 36,673

Mark C. Terrano
Registration Number 40,200

Stephen A. Calogero
Registration Number 41,491

Kermit D. Lopez
Registration Number 41,953

Dennis J. Williamson
Registration Number 32,338

David R. Irvin
Registration Number 42,682

I. Nelson Wakefield
Registration Number 45,190

Thomas M. Croft
Registration Number 44,051

Gary R. Kuhn
Registration Number 44,198

Declaration and Power of Attorney for Patent Application

And I also hereby appoint the Attorneys and Patent Agents of **Coats & Bennett, P.L.L.C.**, as identified by **Customer Number 24112** in the records of the United States Patent and Trademark Office and as updated from time to time, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.



Send Correspondence to: David E. Bennett

Direct Calls to: David E. Bennett

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

SOLE OR FIRST INVENTOR:

Full name: Scott L Vance
First Name Middle Name/Initial Last Name

Signature: Scott L Vance Date: 2000-07-28
First Name Middle Name Last Name Year-Month-Day

Residence: Cary, North Carolina, USA
City, State, and Country

Citizenship: US

Post Office Address: 132 Woodland Drive, Cary, North Carolina 27513

Post Office Address: 4604 Pebble Ct., Raleigh, North Carolina 27613